



**OPERATING INSTRUCTIONS**

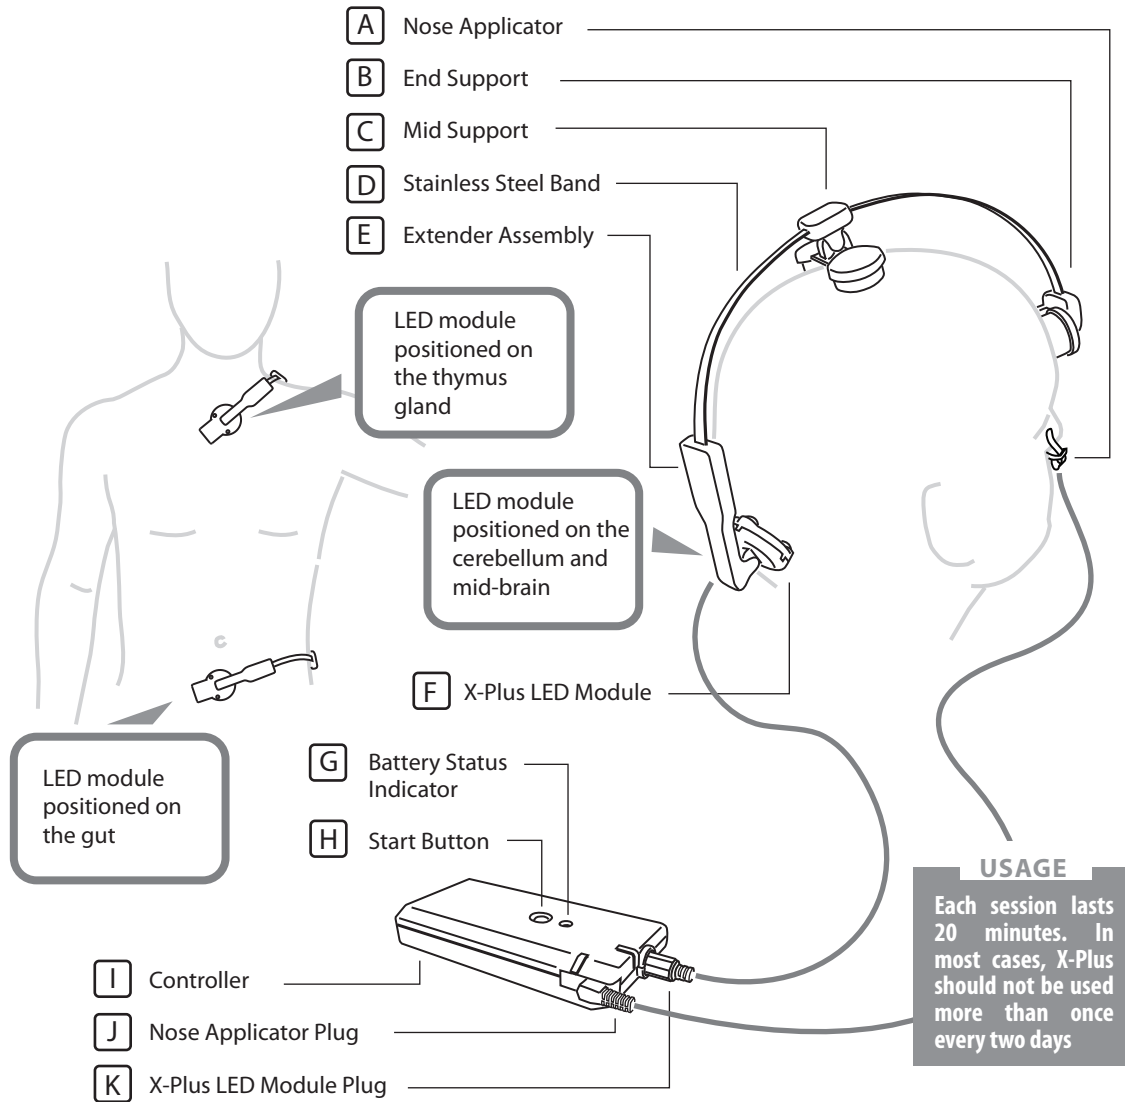


**USAGE**  
 Each session lasts 20 minutes. In most cases, X-Plus should not be used more than once every two days

- 1** Position the X-Plus as shown in the diagram. Ensure that the X-Plus applicator [F] is facing the back of the head or on the chest as shown in the drawings. The device can be used to suite different head or body size by pulling or pushing the extender assembly [E]. The end and mid supports [B, C] can slide for optimal positioning.
- 2** Insert the nose applicator [A] into either the right or the left nostril with the clip on the outside and the lens in the nostril.
- 3** Insert the X-Plus LED module plug [K] and the nose applicator plug [J] into the controller as shown in the diagram.
- 4** Press the start button [H] to begin treatment. It switches off automatically after 20 minutes.


## Indicator Status

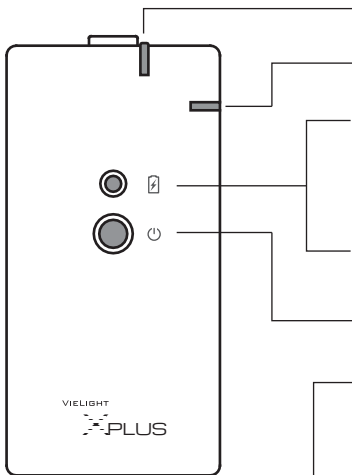

Pulsing / Red	Headset not completely plugged in or is faulty
Pulsing / Red	Nose applicator not completely plugged in or is faulty
None	Power reserve is sufficient
Pulsing / Green	Power reserve is low
Steady / Green	Charging is in progress. The light switches off automatically when charging is completed
Pulsing / Green	Controller is switched on
Red / Pulsing	Treatment module in operation

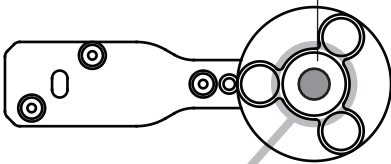

## CHARGING THE BATTERY

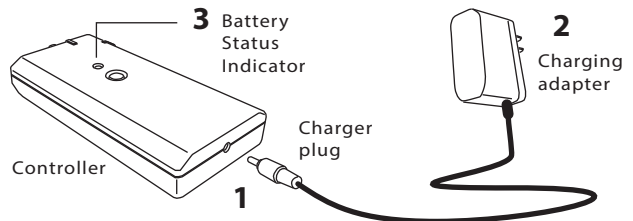

**1** Insert the charger plug completely into the charging socket of the controller.

**2** Connect the charging adapter to a power source. The controller is dual voltage (110V and 220V) and is fitted with a North American plug. Outside of this region, use a travel adaptor for charging.

**3** When the controller is charging, there is a red indicator light. This light switches off automatically when charging is complete. The unit will automatically stop charging after a maximum time of four hours.

- A fully charged controller is sufficient for 20 treatments.
- The controller can be used while it is being charged.



When powered on, a red light is emitted at the tip of the nose and X-Plus applicators.

Note: Most people do not experience any physical discomfort while using the X-Plus. If you do, please contact support@vielight.com.

## Specification

Light Source:	Solid-state 810 nm LED / 633 nm LED
Power:	Regulated
Auto Off Timer:	20 minutes
Battery Type:	NiMH
Power Adapter:	AC Input: 100-240 V, 0.3 A, 50/60 Hz DC Output: 7.5 V, 1.0 A

## Care & Cleaning

1. To clean the Nose Applicator, wipe gently with alcohol or antiseptic wipe. Use a UV sanitizer after cleaning with wipe.
2. Use a soft, dry cloth to clean the other surfaces. Do not use abrasive cleaners. Do not submerge any component in water.
3. Store the equipment in a dry location, free from dust, away from direct sunlight. The storage temperature should be within 10°C to 40°C.

## Limited one-Year warranty

Your Vielight X-Plus is warranted to be free of defect in material and workmanship under normal use.

This warranty is limited to a period of one year from the purchase date. Within this period, repairs or exchange of parts that are deemed necessary by the company will be made free of charge.

This warranty does not cover damage by the following:  
 a. Misuse, abuse or alteration to the product  
 b. Damage caused by accident or neglect  
 c. Service or repairs made by unauthorized persons

WE SHALL NOT BE RESPONSIBLE FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THIS PRODUCT.